



**Absen**  
Trusted LED Supplier



# KLiConSeries

KL116

KL130

KL158



## KLiCon Series

---

Since the New Coronavirus Pneumonia broke out globally in 2020, the demands for remote working and online meetings have surged, driving the vigorous development of the conference room screen market. In the future, with the further development of various sectors such as video conferencing, collaborative office, online training, telemedicine, and remote education, the market demand for conference room screens will further increase, especially that for large-scale screens. Considering the actual needs of customers, Absen has meticulously designed and developed the KLiCon series, a

cost-effective conference room display solution that allows for large format video wall with excellent display effects and visual experience to inspire the work and life for more people.

The KLiCon series supports wireless connection with mobile phones, PADs and computers. It supports easy screen management of meeting content and easily-switch screens, allowing for sharing multiple screens to help improve meeting efficiency and take the meeting experience to the next level.

## Standard sizes, multiple choices



- High quality, reliable solution
- Wireless connection, easy conferencing
- Easy screen management, one-click switching
- Hardware decoding, smooth picture
- Ultra-thin frame, wide vision
- Flexible installations, convenient maintenance



• Conference room



• Lecture hall



• Classroom



• Exhibition hall

### KL116

Standard size: 116"

Display size: 2560\*1440 mm

Recommended size: 40~60 m<sup>2</sup>

Recommended capacity: 20~40

### KL130

Standard size: 130"

Display size: 2880\*1600 mm

Recommended size: 60~80 m<sup>2</sup>

Recommended capacity: 30~50

### KL158

Standard size: 158"

Display size: 3520\*1920 mm

Recommended size: 80~120 m<sup>2</sup>

Recommended capacity: 50~100

## High quality, reliable solution

Absen has been deeply involved in the LED industry for decades and is committed to providing customers with high quality and safe LED displays.



0~700nit\*  
Adjustable brightness



4000:1  
High contrast ratio



110%NTSC  
Wide color gamut




Soft light for eye protection  
Anti-blue light hazard

\*KL116 is adjustable in brightness from 0 to 600nit, and KL130 / KL158 from 0 to 700nit

# Wireless connection, easy conferencing

KLiCon supports connection with mobile phones, PADs, computers and other devices, compatible with Android, MacOS/ iOS, Windows and other systems, and can easily achieve wireless screen sharing.

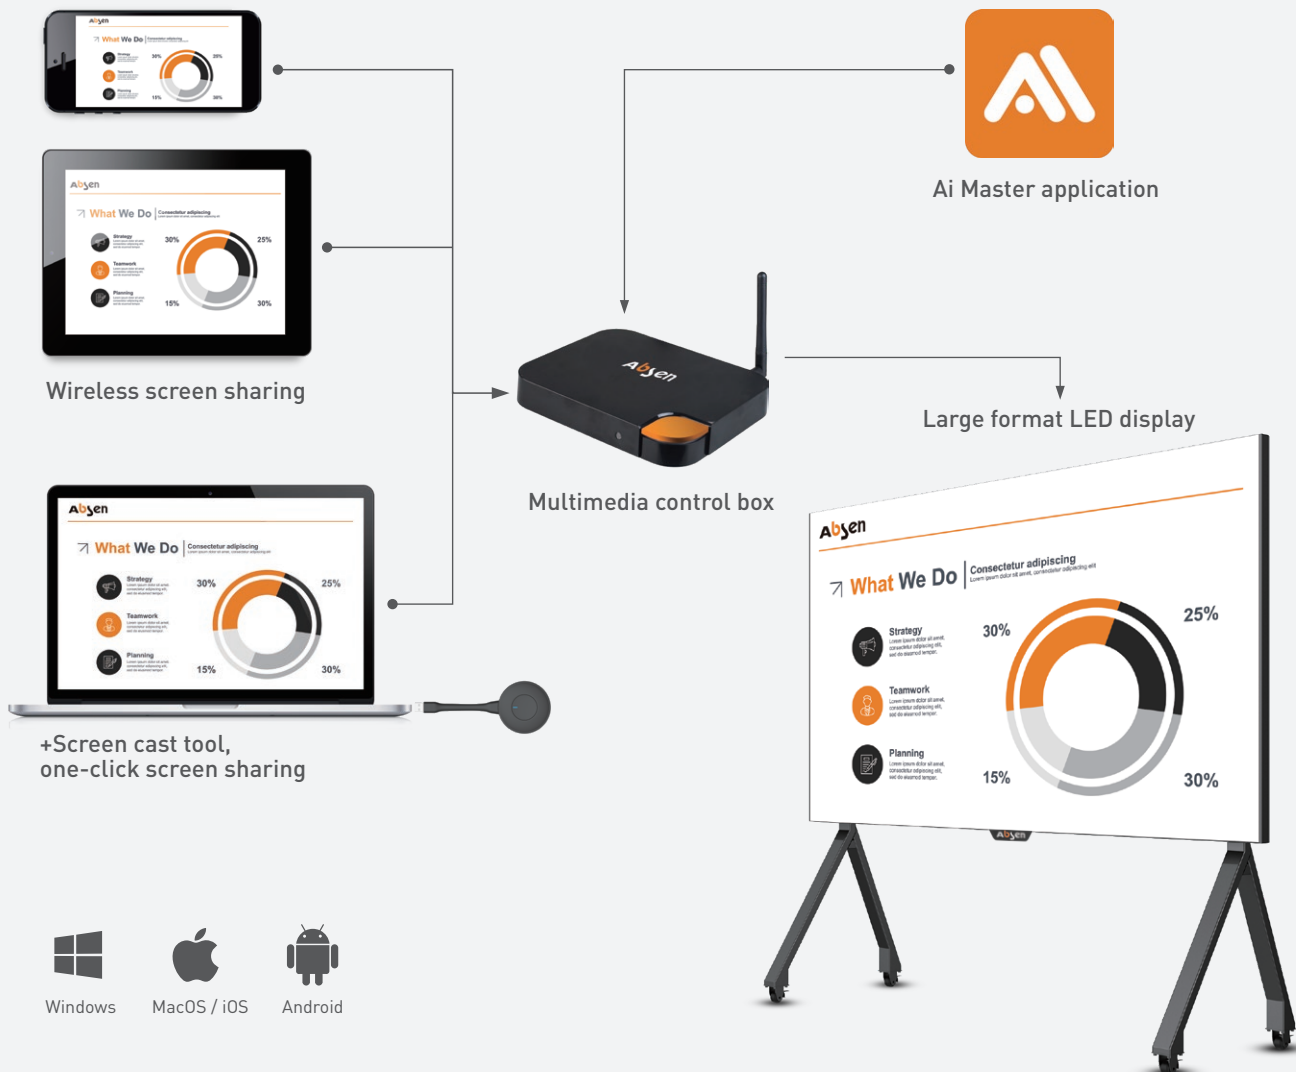





# Easy screen management, one-click switching


KLiCon deploys Ai Master APP for screen management, supporting multi-screen displaying and switching screens with just one click, allowing for presetting theme text and editing program list.



Screen management  
One-click switching

 Theme text


 Video

 Screen sharing

## Support multi-layer screens\*




&

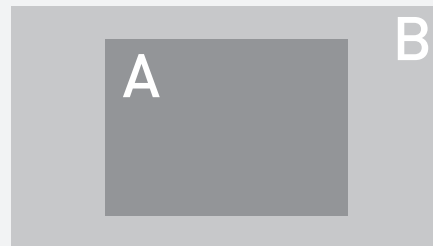

\*Support up to 5 screens, including up to 2 2K video screens

## Hardware decoding, smooth picture


KLiCon supports decoding files of various media formats to ensure the perfect presentation of content, delivering the ultimate meeting experience.

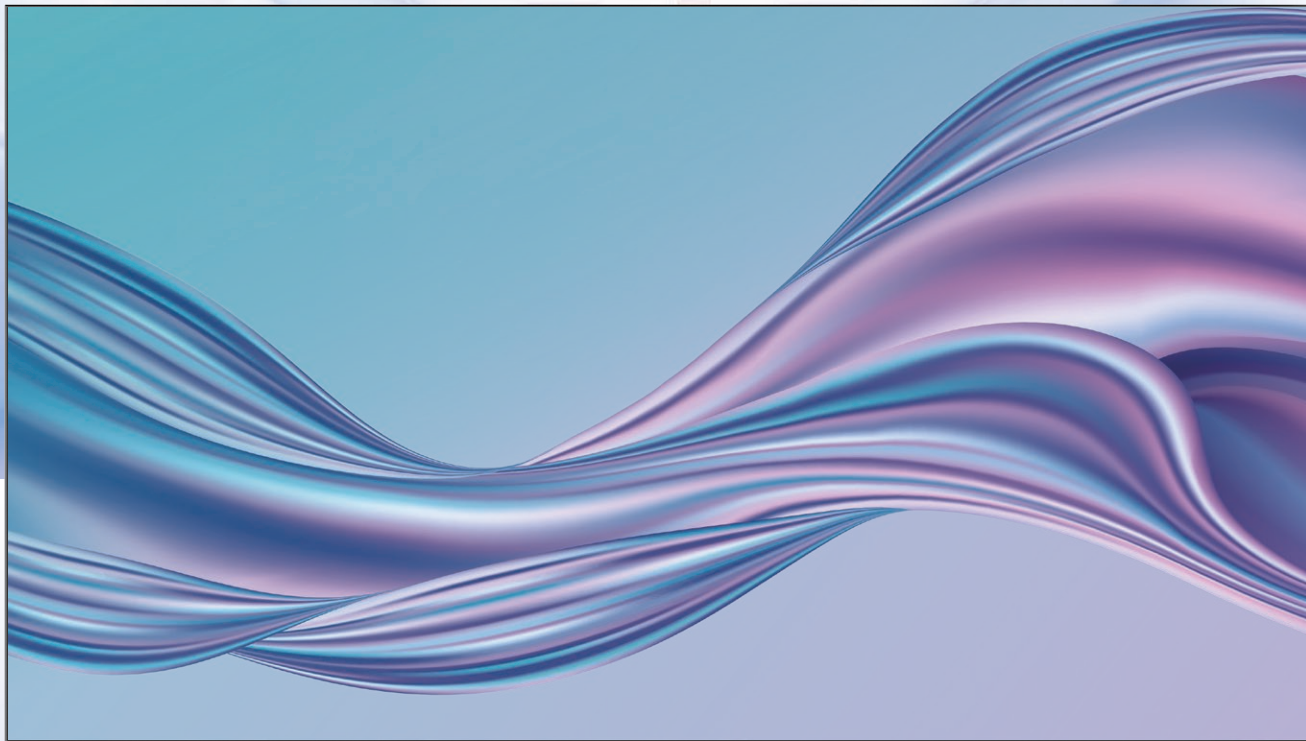

Abgen

## Ultra-thin frame, wide vision

KLiCon features ultra-thin 5mm frame, slim and bezel-free, able to deliver impactful presentations and viewing experience like no other.

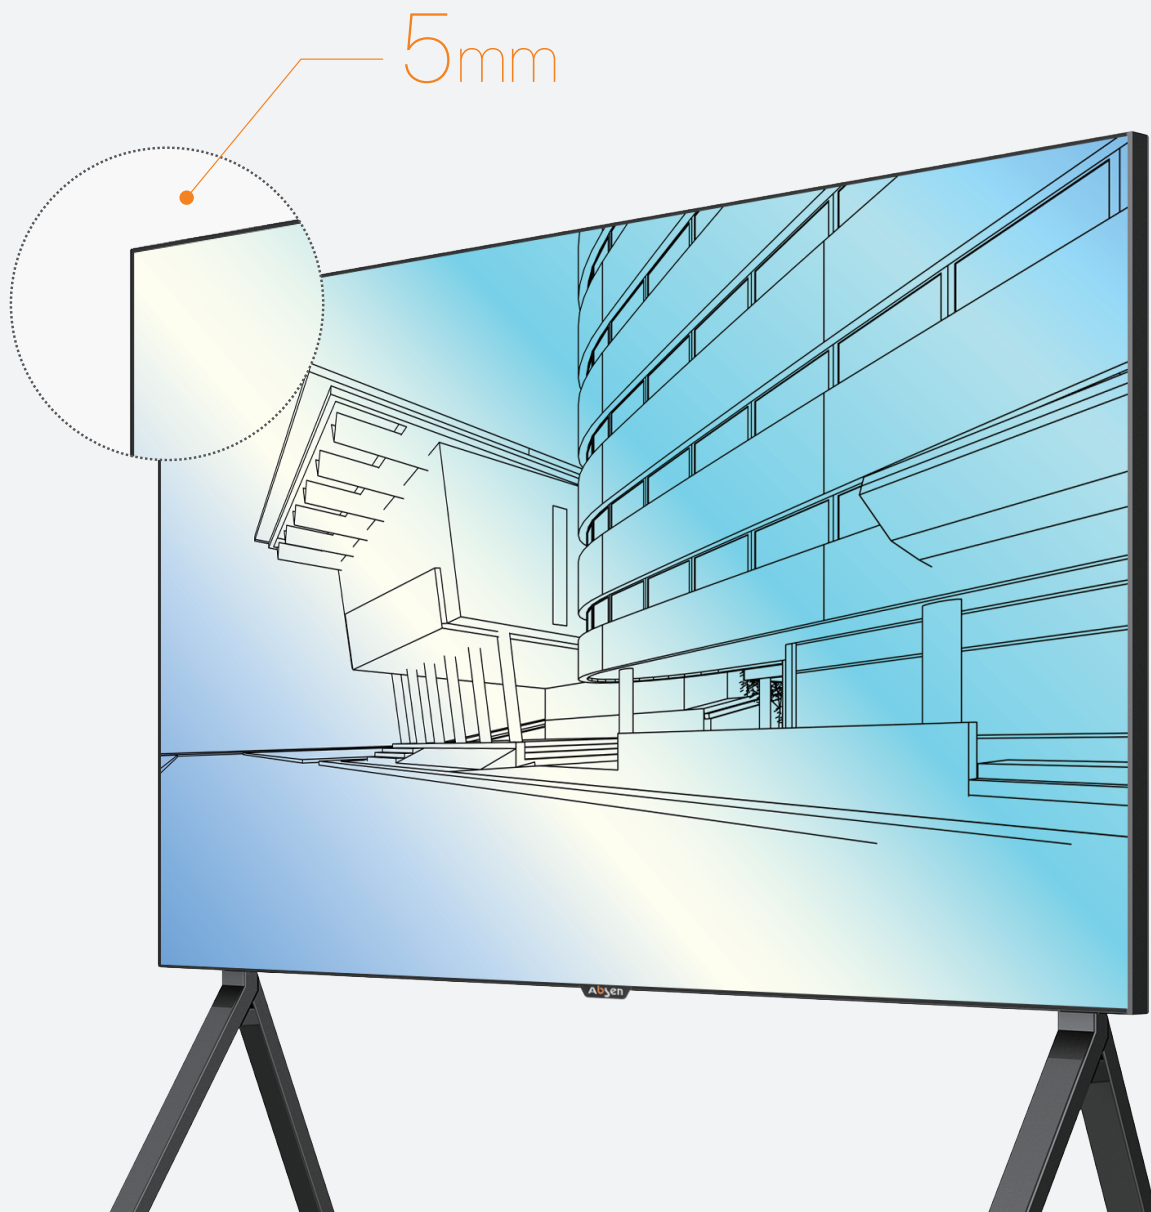



# Flexible installations, convenient maintenance


Allowing for multiple installation methods and full front & rear maintenance, offering extreme flexibility to various application environments.

## LED module


Modular maintenance, no need to replace the entire screen, saving maintenance costs



Mobile stand version

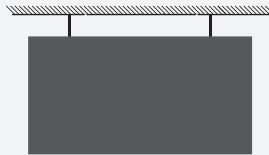

Hanging version



Wall-mounting version

# Professional service, best experience

Absen has built up a global network ,  
able to provide prompt and professional local services.

## Absen service ability



### Comprehensive support

Enjoy 2-year warranty, 1 to 3 years extended warranty, lifetime maintenance, and enjoy 10+ items of professional service solutions to help you solve problems



### Global coverage

400+ Absen certified partners, 2400+ Absen certified engineers, covering most of the global market, the global service network is continuing to expand vigorously



### Multiple service channels

Providing service via multiple channels such as Hot line, WeChat, WhatsApp, E-mail and official website to quickly take care of service requirements



### 24 / 7 response

24/7/365 available, quick response in 10 seconds



### One-stop service

Enjoy exclusive and professional service in the whole process of pre-sales, sales and after-sales

## Absen service philosophy

### Initiative

Proactive care and return visits,  
regular touring inspection services for customers

### Efficiency

All service channels respond within 10 seconds,  
intelligently match the best local service resources,  
and enjoy a fast service experience

### Standardization

Comprehensive service engineer training system,  
ACE professional training and certification,  
ACP professional certification; establishing customer's  
product files and record the entire service process

### Thoughtfulness

Longer warranty, worry-free quality



### Service channels

Hot line: +86 400-700-3278  
WeChat: 13923413428  
WhatsApp: 008613923413428  
E-mail: [service@absen.com](mailto:service@absen.com)  
Official website: [www.absen.com](http://www.absen.com)




### Service time (GMT+8)

8:30-24:00:  
Staff service  
00:00-8:30:  
Intelligent system service

Parameter	KL116			KL130			KL158		
Standard size (inch)	116"			130"			158"		
Display size (width*height, mm)	2560x1440			2880x1600			3520x1920		
Resolution (dots)	2048x1152			1872x1040			1914x1044		
Recommended size (m <sup>2</sup> )	40~60			60~80			80~120		
Total weight (including installation structure weight, kg)	Wall-mounting 104	Hanging 110	Mobile stand 150	Wall-mounting 130	Hanging 136	Mobile stand 176	Wall-mounting 187	Hanging 194	Mobile stand 232
Brightness (nit)	600			700			700		
Refresh rate (Hz)	3840			3840			3840		
Contrast ratio	4000:1			4000:1			4000:1		
Color temperature (K)	6500			6500			6500		
Viewing angle (H/V, °)	140/140			140/140			140/140		
AC operating voltage (V)	200~240			200~240			200~240		
Power consumption (Max./ Avg., W)	2150/750			2600/900			3650/1250		
Certification	CCC			CCC			CCC		

★ Shenzhen Absen Optoelectronic Co., Ltd. reserves the right to modify product design, specifications, and parameters without further notice.  
Photos are used for illustration purpose only as products may differ from these photos. All rights reserved by Shenzhen Absen Optoelectronic Co., Ltd.



#### Absen Optoelectronic Co.,Ltd

18-20F Building 3A, Cloud Park, Bantian Huawei Base,  
Longgang District Shenzhen, 518129, P.R.China  
T: +86-755-89747399 E: absen@absen.com  
F: +86-755-89747599 W: www.absen.com

#### Absen Inc.

7120 Lake Elenor Drive, Orlando,  
Florida 32809, USA  
T: +1-407-203-8870 E: info@usabsen.com  
F: +1-407-203-8873 W: www.usabsen.com

#### Absen GmbH

Eisenstraße 5, 65428 Rüsselsheim a.M.,  
Germany  
T: +49 (0) 6142 78935-0 E: europe@absen.com  
F: +49 (0) 6142 78935-29 W: www.absen-europe.com